


### 3 meter Stand Alone Panel Bridge

Bridge Style:	All Steel Construction. Gravel Deck Surface. Temporary or Permanent placement. L75 or L100 rating.	
Total Span	3000mm	9.84'
Deck Width	4200mm	13.77'
Load Rating	Engineered to L100	
Guard Rail Height	600mm	2'
Add-ons Available	Wooden End walls	Skid Footing Pipe
Shipping Weight (est)	2840 kg	6250 lbs


- 3/8 in Steel Deck Plate
- Single Piece, ready to install
- Gravel Surface, recommend 150 mm granular base.
- 3/8 in Steel lifting points build into structure.
- Re-Usable
- Durable
- Engineered L75 and L100.

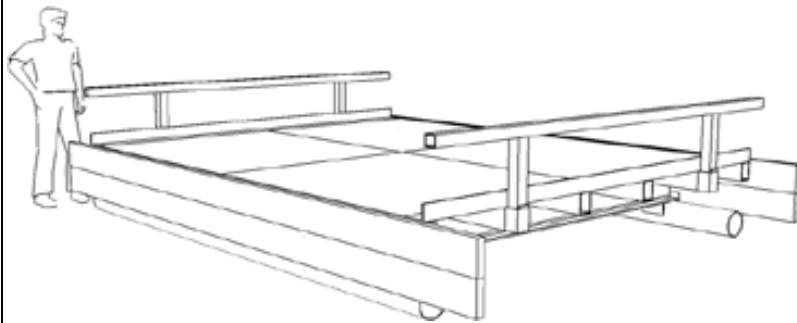

## 6 meter Panel Bridge (2 - 3m panels)

Bridge Style:	100% High Grade Steel. Removable Deck Panels Gravel Deck Surface. Temporary or Permanent placement. Engineered L100 load rating.	
Total Span	6000 mm	19.7'
Deck Width	4200 mm	13.8'
Load Rating	Engineered to L100	
Guard Rail Height	600 mm	2'
Add-ons Available	Wooden End walls	Skid Footing Pipe
Shipping Weight (est)	5680 kg	12,522 lbs

- 2 – 3 meter panels can be removed for easy and quick transport.
- Optional steel brackets and wood end walls.
- Local gravel material running surface.
- Engineered L100 load rating

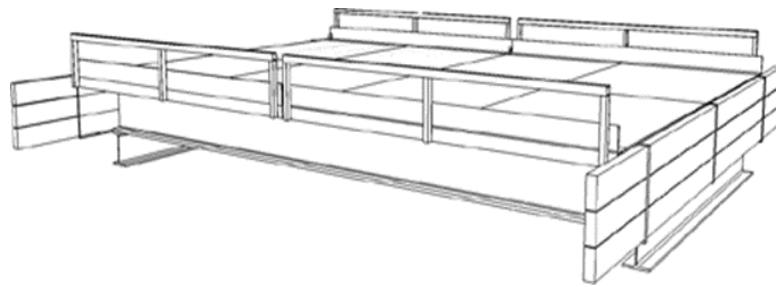



**Quality Panel Bridges and Arch  
Culverts**

2900 Pooley Avenue  
Merritt BC  
250 299-9384  
info@enviro-bridge.com

## 9 meter Panel Bridge (3 - 3m panels)

Bridge Style:	100% High Grade Steel. Removable Deck Panels Gravel Deck Surface. Temporary or Permanent placement. Engineered L100 load rating.	
Total Span	9000 mm	29.53'
Deck Width	4200 mm	13.8'
Load Rating	Engineered to L100	
Guard Rail Height	600 mm	2'
Add-ons Available	Wooden End walls	Skid Footing Pipe
Shipping Weight (est)	8520 kg	18750 lbs

- 3 - 3 meter panels can be removed for easy and quick transport.
- Optional steel brackets and wood end walls.
- Local gravel material running surface.
- Engineered to L100 load rating

